

AP Mode Instructions

Brim Chargers

How to reconnect your Brim charger to your home Wi-Fi, step by step.

Before you start

Use this guide if the MyBrim app can't reconnect your charger to your home Wi-Fi, for example after you change your router or Wi-Fi password. AP mode lets you enter your Wi-Fi details on the charger itself, using your phone's web browser.

You'll need

- Your Pin & Password sticker, which came with your charger.
- Your home Wi-Fi name and password.
- Your phone, close to the charger.

It takes four steps

1. Join the charger's Wi-Fi
2. Log in to the charger
3. Enter your home Wi-Fi
4. Check it's connected


The charger's own Wi-Fi stays on for **15 minutes** after a restart, so have everything ready first.

Stay safe


Never open the charger or remove its front plate. If it looks damaged, smells of burning or keeps tripping your fuse board, switch it off and contact us.

1 Join the charger's Wi-Fi

1. Restart the charger at your fuse board: switch it off, wait 10 seconds, then switch it back on. Only do this if it's safe and you know which switch controls the charger.
2. On your phone, open Wi-Fi settings and join the network that starts with `SN1005`. This is your charger's serial number.
3. Enter the Wi-Fi password from your Pin & Password sticker.

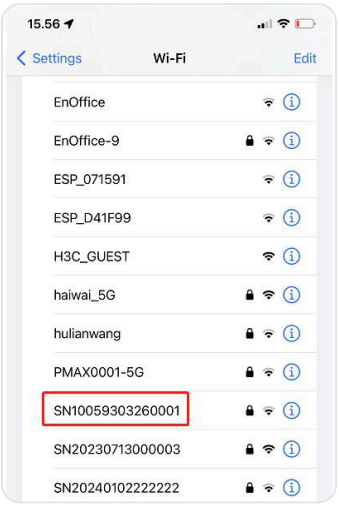

Choose the network that matches your serial number.

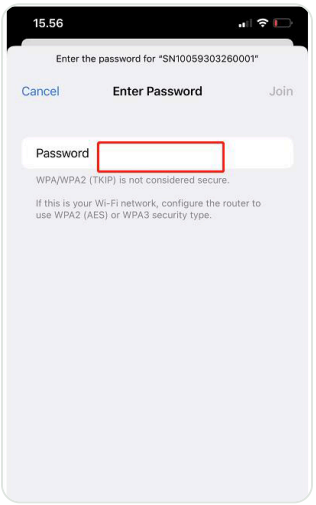


Enter the Wi-Fi password from your sticker.


Your phone may say this network has no internet. That's expected, so stay connected.

2 Log in to the charger

1. Open a web browser on your phone, such as Safari or Chrome.
2. Type `192.168.4.1` in the address bar and go to it.
3. Enter the PIN from your Pin & Password sticker, then tap **Login**.
4. On the next page, tap **Network Settings**.

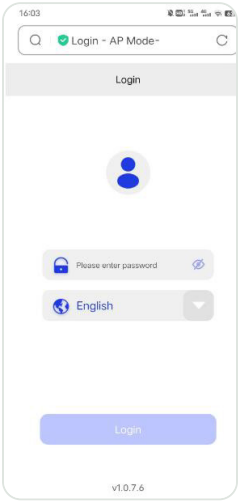


Log in with the PIN from your sticker.

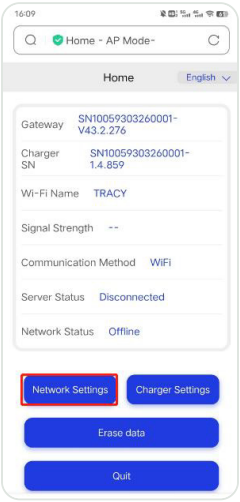

Then tap Network Settings.

3 Enter your home Wi-Fi

1. Choose your home Wi-Fi network from the list.
2. Enter your home Wi-Fi password in the box below it.
3. Tap **Confirm** at the bottom of the page. The charger saves the details and logs you out.

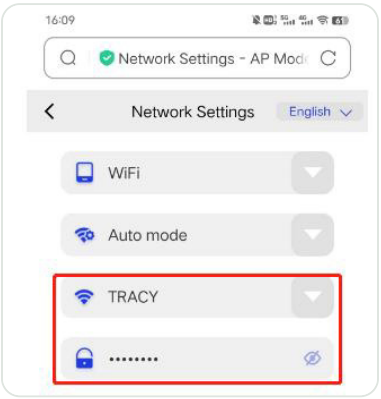


Choose your network and enter its password.

> **Only change the Wi-Fi name and password**
>
> Leave the server address and every other setting as it is.

Can't see your Wi-Fi network in the list? The charger may be too far from your router. A Wi-Fi extender near the charger may help.

4 Check it's connected

1. Log back in at `192.168.4.1` with the same PIN. If your phone has left the charger's Wi-Fi, join it again first.
2. Check **Server Status** says Connected and **Network Status** says Online.
3. Wait 10 minutes, then open the MyBrim app. Your charger should show as online.

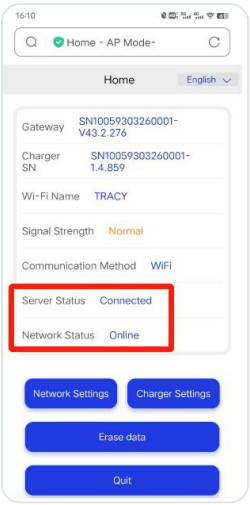

Connected and Online means it worked.

Still offline?

Message us in the MyBrim app. Tell us which step didn't work and what your screen showed. A photo of the screen helps us sort it faster.



Need a hand?

The quickest way to reach us is the chat in the MyBrim app.

plugmein@fulltothebrim.com

+44 (0)20 7097 5911

mybrim.io